



Features of Spring Clamp Terminal Blocks

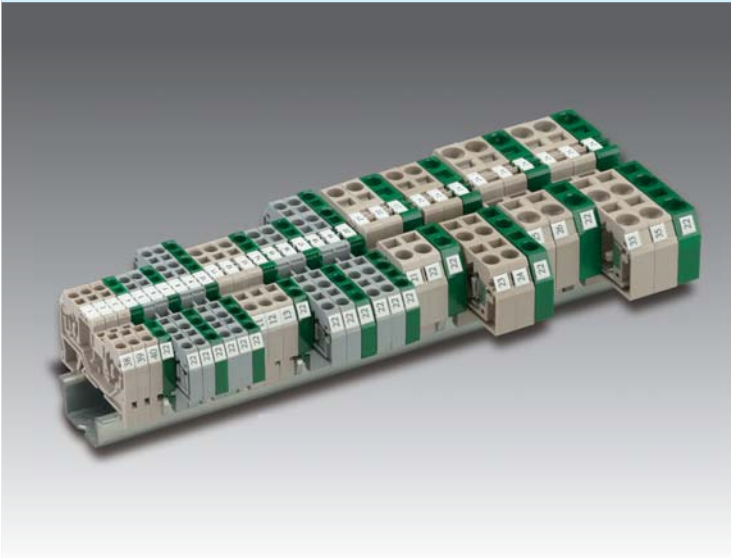

SDU 1.5



Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

彈片壓接型接線座之特性



- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	1.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600V/10A/AWG 16-28	
CSA	600V/10A/AWG 16-28	
IEC	800V/17.5A/0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	4x52x34.5	
For TS35x15	4x52x42	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	SEP15	50
Comb Link (邊接式聯接件)	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
Marking Tags (標記號)	W3 W3Z W3K	500
Tool (工具)	DS2	


SDU 1.5/3















SDU 1.5/4




SDU 2.5




Specifications (產品規格)	1.5 mm ²	1.5 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600V/10A/AWG 16-28	600V/10A/AWG 16-28	 600V/18A/AWG 12-28
CSA	600V/10A/AWG 16-28	600V/10A/AWG 16-28	600V/18A/AWG 12-28
IEC	800V/17.5A/0.2~1.5mm ²	800V/17.5A/0.2~1.5mm ²	 800V/24A/0.2~2.5mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	8-9mm	8-9mm	8-9 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5 	4x62.5x34.5	4x73x34.5	5 x 53 x 35.5
For TS35x15 	4x62.5x42	4x73x42	5 x 53 x 43
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板) 	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板) 	SEP16 50	SEP17 50	SEP 1 50
Comb Link (連接式聯接件) 	SQV1.5/2 50	SQV1.5/2 50	SQV 2.5/2 50
	SQV1.5/3 50	SQV1.5/3 50	SQV 2.5/3 50
	SQV1.5/4 50	SQV1.5/4 50	
MarkingTags (標記號) 	W3 W3Z W3K 500	W3 W3Z W3K 500	W5 W4Z W4K 500
Tool (工具) 	DS2	DS2	DS3


SDU 2.5/3



SDU 2.5/4




SDU 4





Specifications (產品規格)	2.5 mm ²		2.5 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	cUL ^{us} 600V/18A/AWG 12-28		cUL ^{us} 600V/18A/AWG 12-28		cUL ^{us} 600V/20A/AWG 12-28	
CSA	600V/18A/AWG 12-28		600V/18A/AWG 12-28		600V/20A/AWG 12-28	
IEC	△DE 800V/24A/0.2~2.5mm ²		△DE 800V/24A/0.2~2.5mm ²		800V/32A/0.2~4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9 mm		8-9mm		9-10mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	5 x 64 x 35.5		5 x 75 x 35.5		6 x 59 x 36.5	
For TS35x15	5 x 64 x 43		5 x 75 x 43		6 x 59 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	SEP 2	50	SEP 3	50	SEP 4	50
Comb Link (連接式聯接件)	SQV 2.5/2	50	SQV 2.5/2	50	SQV 4/2	50
	SQV 2.5/3	50	SQV 2.5/3	50	SQV 4/3	50
MarkingTags (標記號)	W5 W5Z W5K	500	W5 W5Z W5K	500	W6 W6Z W6K	500
Tool (工具)	DS3		DS3		DS3	

SDU 4/3



SDU 4/4




SDU 6




Specifications (產品規格)	4 mm ²		4 mm ²		6 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c US 600V/20A/AWG 12-28		c US 600V/20A/AWG 12-28		c US 600V/30A/AWG 10-24	
CSA	600V/20A/AWG 12-28		600V/20A/AWG 12-28		600V/30A/AWG 10-24	
IEC	800V/32A/0.2~4mm ²		800V/32A/0.2~4mm ²		800V/41A/0.2~6mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9 mm		9-10 mm		12-13 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	6 x 73.5 x 36.5		6 x 86 x 36.5		8 x 74.5 x 40	
For TS35x15	6 x 73.5 x 44		6 x 86 x 44		8 x 74.5 x 47.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	SEP 5	50	SEP 6	50	SEP 7	50
Comb Link (連接式聯接件)	SQV 4/2	50	SQV 4/2	50	SQV 6/2	50
	SQV 4/3	50	SQV 4/3	50	SQV 6/3	50
MarkingTags (標記號)	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
Tool (工具)	DS3		DS3		DS4	


SDU 6/3



SDU 10




SDU 10/3





Specifications (產品規格)	6 mm ²	10 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600V/30A/AWG 10-24	600V/38A/AWG 8-24	600V/38A/AWG 8-24
CSA	600V/30A/AWG 10-24	600V/38A/AWG 8-24	600V/38A/AWG 8-24
IEC	800V/41A/0.2~6mm ²	800V/57A/0.2~10mm ²	800V/57A/0.2~10mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	12-13 mm	15-16 mm	15-16 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	8 x 93 x 40	10 x 78 x 42.5	10 x 97.5 x 42.5
For TS35x15	8 x 93 x 47.5	10 x 78 x 50	10 x 97.5 x 50
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	SEP 8 50	SEP 9 50	SEP 10 50
Comb Link (連接式聯接件)	SQV 6/2 50	SQV 10/2 50	SQV 10/2 50
	SQV 6/3 50	SQV 10/3 50	SQV 10/3 50
MarkingTags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
Tool (工具)	DS4	DS5	DS5

Features of Spring Clamp Terminal Blocks

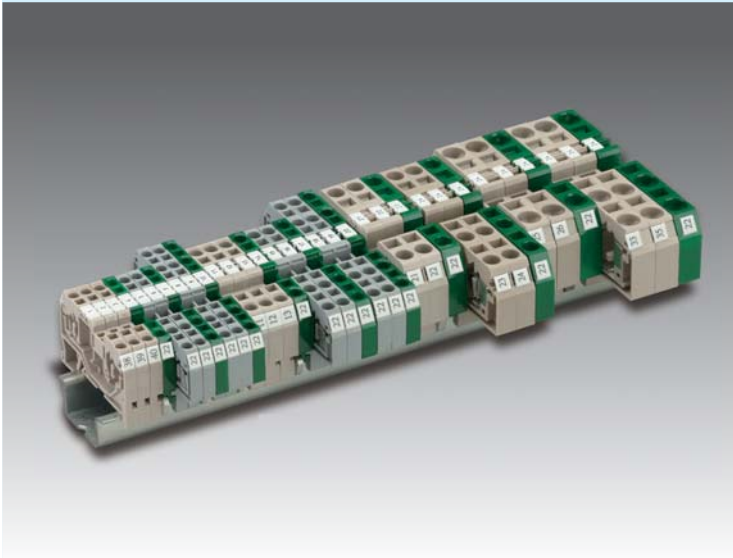

SDU 16









Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

彈片壓接型接線座之特性


- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	16 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	cUL ^{us} 600V/65A/AWG 4-16	
CSA	600V/65A/AWG 4-16	
IEC	800V/85A/1.5-16 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	16-17mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	12.2x82.5x51	
For TS35x15 	12.2x82.5x58.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	SEP12	50
Comb Link (邊接式聯接件) 	SQV16/2	50
Marking Tags (標記號) 	W6 W6Z W6K	500
Tool (工具) 	DS5	


SDU 16/3














SDU 35



SDK 2.5



Specifications (產品規格)	16 mm ²	35 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600V/65A/AWG 4-16	600V/120A/AWG 2-12	 600V/20A/AWG 12-28
CSA	600V/65A/AWG 4-16	600V/120A/AWG 2-12	600V/20A/AWG 12-28
IEC	800V/76A/1.5~16mm ²	800V/125A/2.5~35mm ²	800V/24A/0.2~2.5mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	16-17mm	25mm	8-9 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5 	12.2x107.8x51	16x100x59	5x75.5x44.5
For TS35x15 	12.2x107.8x58.5	16x100x66.5	5x75.5x52
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板) 	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板) 	SEP13 50	SEP14 50	SEP 11 50
Comb Link (邊接式聯接件) 	SQV16/2 50	SQV35/2 50	SQV 2.5/2 50 SQV 2.5/3 50
MarkingTags (標記號) 	W6 W6Z W6K 500	W6 W6Z W6K 500	W5 W5Z W5K 500
Tool (工具) 	DS5	DS6	DS3

Features of spring Clamp Terminal Blocks



SDUB 1.5














Features of Spring Clamp Terminal Blocks


- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismantling from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	1.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	 US	300V/10A/AWG28-16
CSA		300V/10A/AWG28-16
IEC		400V/17.5A/0.2-1.5 mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)		6KV / 3
Insulation stripping length(mm) (剝線長度)		8-10mm
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)	T / W / H (mm)	
	5x25x17	
Accessories (附件)	Cat. No.	Qty.
	SDUB 1.5-A	25
	SDUB 1.5/2-B	25
	SDUB 1.5/2-A	25
	SDUB 1.5/2-B	25
End Bracket (擋板) 	SDUB 1.5/2-C	25
Comb Link (邊接式聯接件) 	SQB 1.5	25
Lever (壓板) 	SDUB 1.5-D	25
Tool (工具) 	DS 2.5	10


SDUB 1.5/2






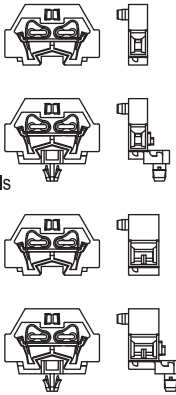






SDUB 2.5



SDUB 2.5/2




Specifications (產品規格)	1.5 mm ²	2.5 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	300V/10A/AWG28-16	 300V/15A/AWG28-14	300V/15A/AWG28-14
CSA	300V/10A/AWG28-16	300V/15A/AWG28-14	300V/15A/AWG28-14
IEC	400V/17.5A/0.2-1.5 mm ²	 500V/24A/0.2-2.5 mm ²	500V/24A/0.2-2.5 mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	6KV / 3	6KV / 3	6KV / 3
Insulation stripping length(mm) (剝線長度)	8-10mm	8-10mm	8-10mm
Material/Available Color (材質顏色)			
Dimensions (外形尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
	8x25x17	6x28x18	10x28x18
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
 Central Terminals (中間端子)	SDUB 1.5-A 25	SDUB 2.5-A 25	SDUB 2.5-A 25
	SDUB 1.5-B 25	SDUB 2.5-B 25	SDUB 2.5-B 25
	SDUB 1.5/2-A 25	SDUB 2.5/2-A 25	SDUB 2.5/2-A 25
	SDUB 1.5/2-B 25	SDUB 2.5/2-B 25	SDUB 2.5/2-B 25
 End Bracket (擋板)	SDUB 1.5-C 25	SDUB 2.5-C 25	SDUB 2.5-C 25
 Comb Link (邊接式聯接件)	SQB 1.5 25	SQB 2.5 25	SQB 2.5 25
 Lever (壓板)	SDUB 1.5-D 25	SDUB 2.5-D 25	SDUB 2.5-D 25
 Tool (工具)	DS 2.5 10	DS 3 10	DS 3 10

SDUB 4




SDUB 4/2



Specifications (產品規格)	4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	cUL ^{us} 300V/20A/AWG28-12		cUL ^{us} 300V/20A/AWG28-12	
CSA	300V/20A/AWG28-12		300V/20A/AWG28-12	
IEC	630V/24A/0.2-4mm ²		630V/24A/0.2-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	6KV / 3		6KV / 3	
Insulation stripping length(mm) (剝線長度)	9-10mm		9-10mm	
Material/Available Color (材質顏色)				
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)	
	7x33.4x23		12x33.4x23	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 4-A	25	SDUB 4-A	25
	SDUB 4-B	25	SDUB 4-B	25
	SDUB 4/2-A	25	SDUB 4/2-A	25
	SDUB 4/2-B	25	SDUB 4/2-B	25
 End Bracket (擋板)	SDUB 4-C	25	SDUB 4-C	25
 Comb Link (邊接式聯接件)	SQB 4	25	SQB 4	25
 Lever (壓板)	SDUB 4-D	25	SDUB 4-D	25
 Tool (工具)	DS 3	10	DS 3	10

Features of Spring Clamp Terminal Blocks

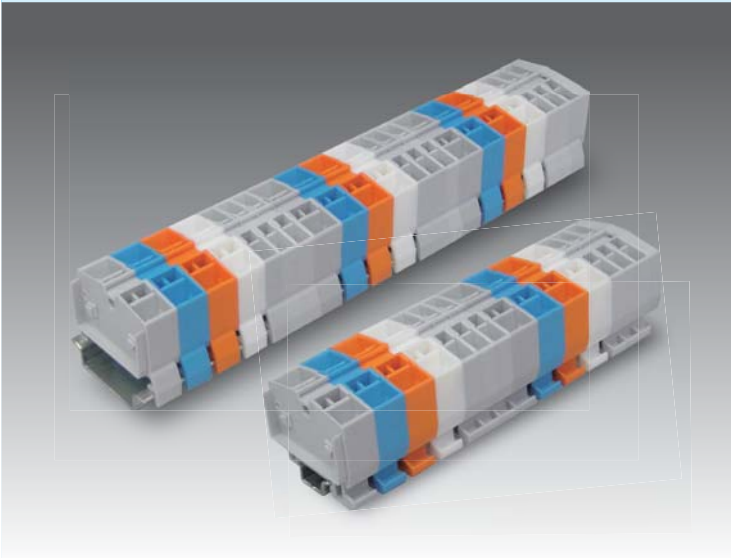

SDUNP 2.5












Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	c  US 600V/15A/AWG 12-28	
CSA	600V/15A/AWG 12-28	
IEC	800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	-	
For TS35x15 	-	
For TS15x5.5 	6x32.2x30	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW15	50
End Plate (擋板) 	SDUNB2.5-C	50
Comb Link (邊接式聯接件) 	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
MarkingTags (標記號) 	W6 W6Z W6K	500
Tool (工具) 	DS3	


SDUNP 2.5/2



SDUNT 2.5




SDUNT 2.5/2



Specifications (產品規格)	2.5 mm ²		2.5 mm ²		2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	600V/15A/AWG 12-28		cUL [®] 600V/15A/AWG 12-28		600V/15A/AWG 12-28	
CSA	600V/15A/AWG 12-28		600V/15A/AWG 12-28		600V/15A/AWG 12-28	
IEC	800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm		10-12mm		10-12mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5			6x37x32		10x37x32	
For TS35x15			6x37x39.5		10x37x39.5	
For TS15x5.5	10x32.2x30					
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW15	50	SEW35	50	SEW35	50
End Plate (擋板)	SDUNB2.5-C	50	SDUNB2.5-C	50	SDUNB2.5-C	50
Comb Link (連接式聯接件)						
Marking Tags (標記號)	W5 W5Z W5K	500	W6 W6Z W6K	500	W5 W5Z W5K	500
Tool (工具)	DS3		DS3		DS3	

Features of spring Clamp Terminal Blocks

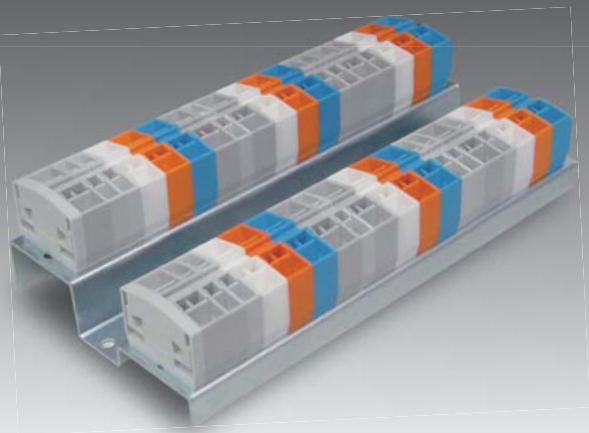

SDUNB 2.5



Features of Spring Clamp Terminal Blocks


- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	2.5 mm ²		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	cUL [®] US 600V/15A/AWG28-12		
CSA	600V/15A/AWG28-12		
IEC	800V/24A/0.2-2.5 mm ²		
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3		
Insulation stripping length(mm) (剝線長度)	10-12mm		
Material/Available Color (材質顏色)			
Dimensions (外形尺寸)	T / W / H (mm)		
	6x22.2x32.2		
Accessories (附件)	Cat. No.	Qty.	
(中間端子)	SDUNB2.5-B	25	
	SDUNS2.5-B	25	
	SDUNS2.5/2-A	25	
	SDUNB2.5/2-B	25	
End Bracket (終端擋板)	SDUNB2.5-C	25	
Comb Link (邊接式聯接件)			
Marking Tags (標記號)	W6	W6Z	W6K 500
End Plate (擋板)			
Tool (工具)	DS3	25	


SDUNB 2.5/2













SDUNS 2.5




SDUNS 2.5/2




Specifications (產品規格)	2.5 mm ²		2.5 mm ²		2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	600V/15A/AWG28-12		c  US 600V/15A/AWG28-12		600V/15A/AWG28-12	
CSA	600V/15A/AWG28-12		600V/15A/AWG28-12		600V/15A/AWG28-12	
IEC	800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm		10-12mm		10-12mm	
Material/Available Color (材質顏色)						
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
	10x22.2x32.2		6x22.2x32.2		10x22.2x32.2	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
Terminal Strip (中間端子) 	SDUNS2.5-B	25	SDUNS2.5-A	25	SDUNS2.5-A	25
	SDUNB2.5-B	25	SDUNS2.5-B	25	SDUNS2.5-B	25
	SDUNB2.5/2-B	25	SDUNS2.5/2-B	25	SDUNS2.5/2-B	25
	SDUNS2.5/2-A	25				
End Bracket (終端擋板) 	SDUNB2.5-C	25	SDUNS2.5-C	25	SDUNS2.5-C	25
Comb Link (連接式聯接件) 						
Marking Tags (標記號) 	W5 W5Z W5K	500	W6 W6Z W6K	500	W5 W5Z W5K	500
End Plate (擋板) 						
Tool (工具) 	DS3		DS3		DS3	

Features of spring Clamp Terminal Blocks

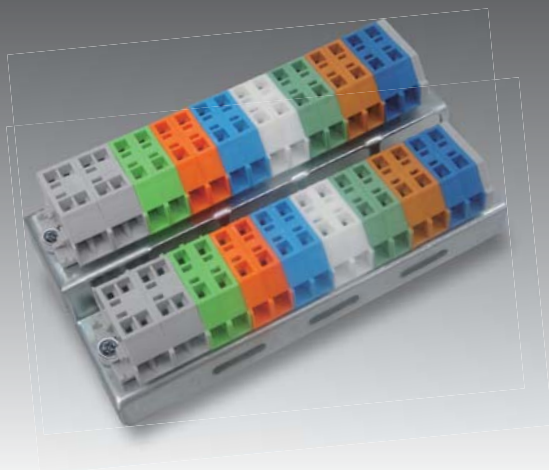

SDUS 1.5









Features of Spring Clamp Terminal Blocks


- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性


- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	116	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	UL [®] 300V/10A/AWG28-16	
CSA	300V/10A/AWG28-16	
IEC	400V/17.5A/0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	
Insulation stripping length(mm) (剝線長度)	8-10mm	
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)	T / W / H (mm)	
	5x25x17	
Accessories (附件)	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 1.5-B	25
 Central Terminals (中間端子)	SDUB 1.5/2-B	25
End Bracket (擋板) 	SDUB 1.5-C	25
Comb Link (邊接式聯接件) 	SQB 1.5	25
Lever (壓板) 	SDUB 1.5-D	25
Tool (工具) 	DS 2.5	10



SDUS 1.5/2













SDUS 2.5





SDUS 2.5/2












Specifications (產品規格)	1.5 mm ²	2.5 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	300V/10A/AWG28-16	 300V/15A/AWG28-14	300V/15A/AWG28-14
CSA	300V/10A/AWG28-16	300V/15A/AWG28-14	300V/15A/AWG28-14
IEC	400V/17.5A/0.2-1.5 mm ²	 500V/24A/0.2-2.5 mm ²	500V/24A/0.2-2.5 mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	8-10mm	8-10mm	8-10mm
Material/Available Color (材質顏色)			
Dimensions (外形尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
	8x25x17	6x28x18	10x28x18
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
 Central Terminals (中間端子)	SDUB 1.5-B 25	SDUB 2.5-B 25	SDUB 2.5-B 25
	SDUB 1.5/2-B 25	SDUB 2.5/2-B 25	SDUB 2.5/2-B 25
 End Bracket (擋板)	SDUB 1.5-C 25	SDUB 2.5-C 25	SDUB 2.5-C 25
 Comb Link (邊接式聯接件)	SQB 1.5 25	SQB 2.5 25	SQB 2.5 25
 Lever (壓板)	SDUB 1.5-D 25	SDUB 2.5-D 25	SDUB 2.5-D 25
 Tool (工具)	DS 2.5 10	DS 3 10	DS 3 10

SDUS 4

SDUS 4/2



Specifications (產品規格)	4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c  us 300V/20A/AWG28-12		c  us 300V/20A/AWG28-12	
CSA	300V/20A/AWG28-12		300V/20A/AWG28-12	
IEC	630V/24A/0.2-4mm ²		630V/24A/0.2-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	9-10mm		9-10mm	
Material/Available Color (材質顏色)				
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)	
	7x33.4x23		12x33.4x23	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 4-B	25	SDUB 4-B	25
	SDUB 4/2-B	25	SDUB 4/2-B	25
 End Bracket (擋板)	SDUB 4-C	25	SDUB 4-C	25
 Comb Link (邊接式聯接件)	SQB 4	25	SQB 4	25
 Lever (壓板)	SDUB 4-D	25	SDUB 4-D	25
 Tool (工具)	DS 3	10	DS 3	10